
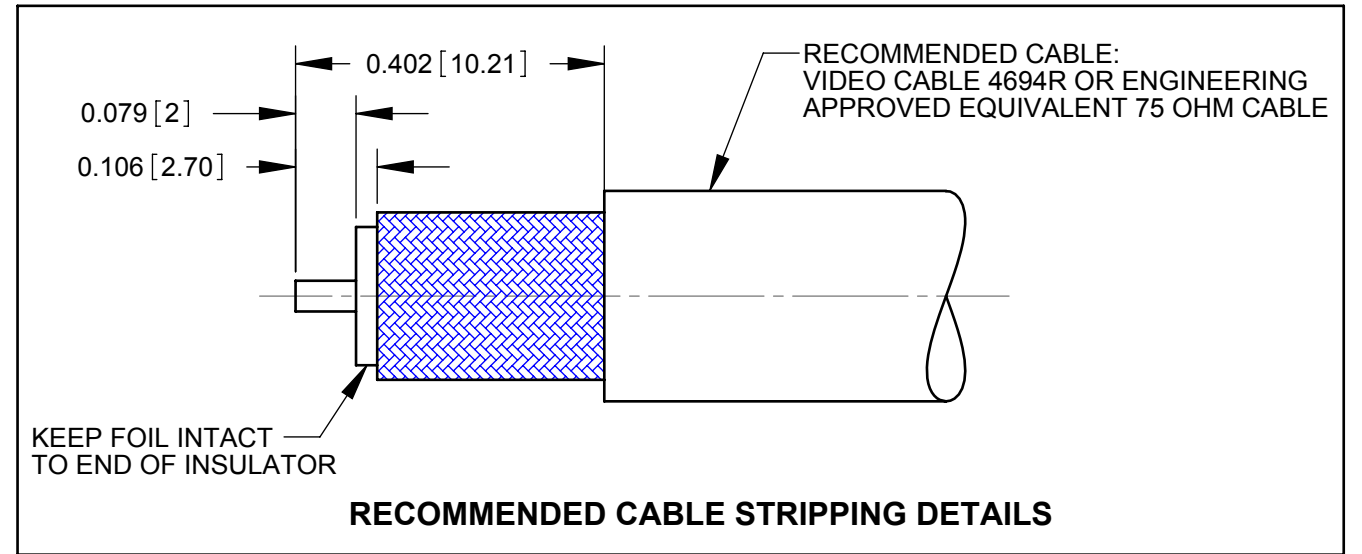


DIMENSIONS SHOWN FOR REFERENCE ONLY

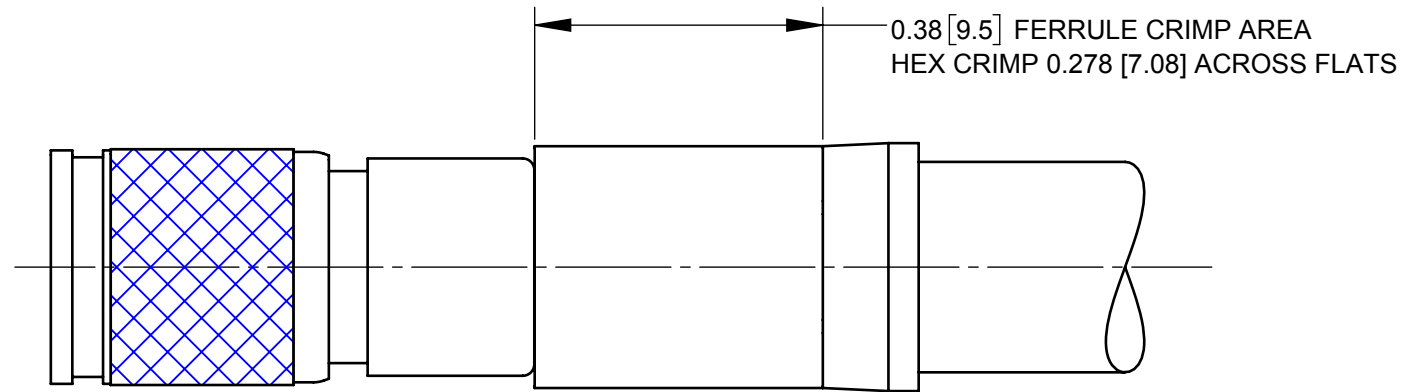

NOTES:

1. MEETS SMPTE 2082-1  
CHARACTERISTIC IMPEDANCE: 75 OHMS  
CONTACT RESISTANCE: 50 MILLIOHMS MAX.
2. MATERIAL:  
BODY: COPPER ALLOY, NICKEL PLATED.  
CONTACT PIN: COPPER ALLOY, GOLD PLATED.  
SPRING: BERYLLIUM COPPER, NICKEL PLATED.  
TINE CONTACT: BERYLLIUM COPPER, GOLD PLATED.  
INSULATOR: TEFLON  
FERRULE: COPPER ALLOY, NICKEL PLATED.
3. THIS PRODUCT IS RoHS COMPLIANT.

**CUSTOMER DRAWING**

					THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY.					
					SIZE	WIDTH	MULT	LBS/M	TEMPER	
					UNLESS OTHERWISE SPECIFIED			MATERIAL SEE NOTES		
					1. ALL DIMENSIONS IN INCHES			SPEC No.		
					- TWO PLACE DECIMALS ±0.02			SCALE 4:1		
					- THREE PLACE DECIMALS ±0.005			FIRST USED ON		
0A	PDR 16006	04/05/17	PNK	SRC	DATE DRAWN	BY	CHKD	APVD	<b>Switchcraft</b> <sup>®</sup>	
REV	ECO NUMBER	DATE	BY	APVD	04/05/17	PNK	04/05/17	04/05/17		
REVISIONS					DO NOT SCALE DRAWING					
					NAME UHD DIN 1.0/2.3 PLUG 75OHMS, 4694R, RoHS				PART No. UHDDIN94	
									SHEET 1 OF 1	
									REV 0A	